


Pot Lights for LED Lamps

3-1/2" and 4"

10W and 12W Max Remodel IC Housings

XR35GU10-L, XR40PAR-L

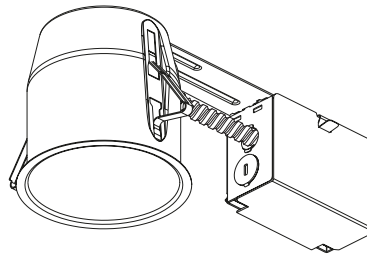

INSTALL AND USE THIS PRODUCT FOLLOWING AS PER APPLICABLE LOCAL ELECTRICAL CODES.

PREPARATION

- Read the instructions before installing this housing and have a qualified licensed electrician install it for you.
- Before proceeding, be sure the ceiling construction follows the requirements shown in (Fig. 1.)
- **SHUT OFF ELECTRICAL SUPPLY AT SOURCE.**

1. Bring the electrical wiring in the ceiling respecting local electrical codes.

DRILL A HOLE

2. Locate the center of proposed opening on your ceiling material and mark it. Draw a circle \varnothing 3-3/4" (96 mm) for 3-1/2" housing and \varnothing 4-1/4" (108 mm) for 4" housing (Fig. 2). Cut the hole.

ELECTRICAL CONNECTION











3. Remove the junction box cover by pushing on the spring latch. Remove the appropriate knockout(s) to accommodate your wiring. Connect the wires coming from the power supply to the junction box wires, and match colors together (White/White, Black/Black, Green/Green, see Fig.3). Close the junction box.

IMPORTANT: Leave an extra length of 6" of supply leads and ground wire inside the junction box.

INSTALLATION

4. Slide the fixture into position while pulling the hooks inwards (Fig. 4).
5. Push the fastening hooks through the lateral openings (Fig. 5).
6. Fasten the fixture with the adjustment screws (Fig. 6).
7. Insert the lamp into the socket (Fig. 7).
8. Fix the socket and the lamp assembly into the trim (Fig. 8).
9. Insert the trim into the housing (Fig. 9).

Please keep these instructions for maintenance reference.

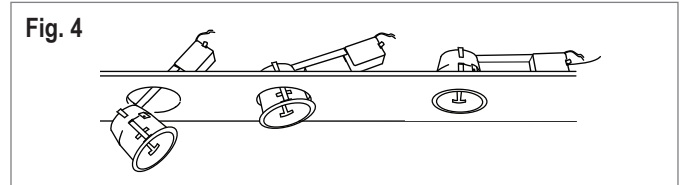

WARNING-RISK OF FIRE. MOST DWELLINGS BUILT BEFORE 1985 HAVE SUPPLY WIRE RATED 60°C. CONSULT A QUALIFIED ELECTRICIAN BEFORE INSTALLING.