

Odyssey

Project _____


Notes _____

Fixture Type _____

Date _____



CIRCLE




LED circular shaped luminaire in extruded aluminium 6063-T52 with Satinice acrylic diffuser.



LIGHT DIRECTION

Four choices of light distribution orientation.
Optimal transmission and diffusion by using Satinice acrylic.

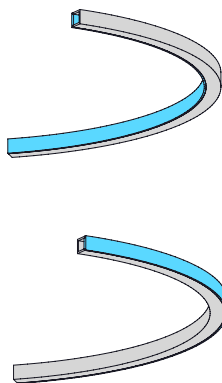



I (Interior)

O (Exterior)








DIMENSIONS

Extruded aluminum 6063-T52 available in four dimensions.

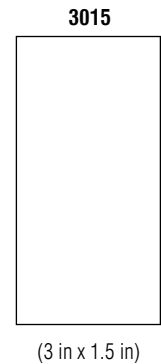

LIGHT DIRECTION (CONTINUED)

DIMENSIONS (CONTINUED)

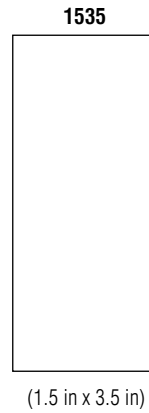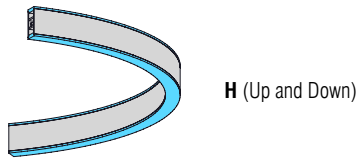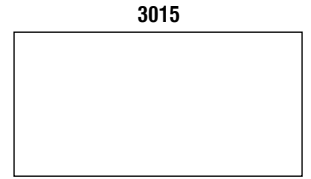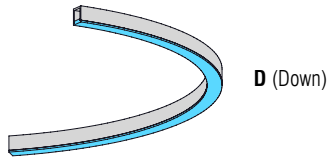

DIAMETER

Six polyvalent diameters from 24 inches to 72 inches.
An infinite number of possible combinations for small to large spaces.

Below, the diameters available with extrusion dimensions:

1010 and 1510: 7W per linear foot

1535 and 3015: 14W per linear foot

1010		1510		3015		1535	
24	24 inches (44W)	36	36 inches (66W)	48	48 inches (176W)	60	60 inches (220W)
30	30 inches (55W)	48	48 inches (88W)	60	60 inches (220W)	72	72 inches (264W)
36	36 inches (66W)	60	60 inches (110W)	72	72 inches (264W)		

COLOR TEMPERATURES

Four color temperature choices for a high quality atmosphere that exceeds your expectations.



CRI of 90+ with each color temperatures.

2790: 2700K
3090: 3000K
3590: 3500K
4090: 4000K

3000K DATA

Light Direction	7W / linear foot	14W / linear foot
D (Down)	200 lm / ft	460 lm / ft
I (Interior) / O (Exterior)	280 lm / ft	620 lm / ft

Light Direction	14W / linear foot	
H (Up and Down)	Up: 230 lm / ft	Down: 230 lm / ft

FINISHES

Powder coating.
 10 impeccable finishes available:



Also available with RAL painted colors (www.ralcolor.com) and much more.
 If you want a particular colour, contact us.


ORDERING CODES

FAMILY	LIGHT DIRECTIONS	DIMENSIONS	DIAMETERS	COLOR TEMPERATURES AND CRI	FINISHES
C					
C Circle	D Down	1010 1 in x 1 in	24 24 in (44W)	2790 2700K (90+ of CRI)	MW Matte White
	I Interior		30 30 in (55W)	3090 3000K (90+ of CRI)	MB Matte Black
	O Exterior		36 36 in (66W)	3590 3500K (90+ of CRI)	CR Chrome
				4090 4000K (90+ of CRI)	SV Silver
		1510 1.5 in x 1 in	36 36 in (66W)		CA Charcoal
			48 48 in (88W)		PG Pearl Gold
			60 60 in (110W)		FB Fawn Brown
		3015 3 in x 1.5 in	48 48 in (176W)		TB Turquoise Blue
			60 60 in (220W)		SR Sparkle Red
			72 72 in (264W)		SB Sparkle Black
					CC Custom Color RAL and much more
	H Up and Down	1535 1.5 in x 3.5 in	60 60 in (220W)		
			72 72 in (264W)		
		XXXX Custom	XX Custom		

SUSPENSION SYSTEM

OPTION A

Steel cables fixed directly in the ceiling.
Driver located inside the canopy.




ORDERING CODES

SYSTEM	SHAPE	DIMENSIONS	CABLES	LUMINAIRE NUMBERS	DIMMING	FINISHES
A	C				D0	
A	C Circle	D109 ø 9 in D114 ø 14 in XXXX Custom	WH White BK Black GP Platinum Gray	1 2 3	D0 0-10V	MW Matte White MB Matte Black CR Chrome SV Silver CA Charcoal PG Pearl Gold FB Fawn Brown TB Turquoise Blue SR Sparkle Red SB Sparkle Black CC Custom Color RAL and much more

OPTION B

Steel cables fixed directly to the center of the canopy.
Driver located inside the canopy.




ORDERING CODES

SYSTEM	SHAPE	DIMENSIONS	CABLES	LUMINAIRE NUMBERS	DIMMING	FINISHES
B	C				D0	
B	C Circle	D109 ø 9 in D114 ø 14 in XXXX Custom	WH White BK Black GP Platinum Gray	1 2 3	D0 0-10V	MW Matte White MB Matte Black CR Chrome SV Silver CA Charcoal PG Pearl Gold FB Fawn Brown TB Turquoise Blue SR Sparkle Red SB Sparkle Black CC Custom Color RAL and much more

SUSPENSION SYSTEM (CONTINUED)

OPTION C

Steel cables fixed directly in the ceiling.
Decorative plate. Driver located inside the ceiling.



ORDERING CODES

SYSTEM	DIMENSION	CABLES	LUMINAIRE NUMBERS	DIMMING	FINISHES
C	1010			D0	
C	1010	WH White BK Black	1 2	D0 0-10V	MW Matte White MB Matte Black
	1016	GP Platinum Gray	3		CR Chrome SV Silver CA Charcoal PG Pearl Gold FB Fawn Brown TB Turquoise Blue SR Sparkle Red SB Sparkle Black CC Custom Color RAL and much more

For these models:

CI301560-XXXXXX
 CI301572-XXXXXX
 CO301560-XXXXXX
 CO301572-XXXXXX
 CD301560-XXXXXX
 CD301572-XXXXXX
 CH153560-XXXXXX
 CH153572-XXXXXX