

IT2000CE



4" 2000 Series

Project	
Notes	
Fixture Type	
Date	


Shallow Remodel Housing with Electronic Transformer

SPECIFICATIONS

HOUSING DETAILS	Up to 0,051" (1,3 mm) thick galvanized steel housing. Junction box can support up to 10 – 14 gauge wires or 8 – 12 gauge wires. Below-ceiling accessible.			
MOUNTING	Cutout diameter: Ø 4-1/4" (108 mm) Can fit in ceilings from 1/2" (13 mm) up to 1-1/4" (32 mm) thick. Requires a 4-1/2" (114 mm) clearance beyond the ceiling level. Must be installed 3" (73 mm) from any insulating material. Patented hook (PAT#CAN 2,088,648 and #USA 5,377,088) for ease of installation and a perfect fit to ceiling. Socket preset for easy installation. No light leakage.			
LAMP	MR16 GU 5.3 42W MAX This product was designed for a MR16 halogen lamp. If you want to use dimming and you replace MR16 lamp by an equivalent LED MR16 lamp, please refer regularly to the lamp manufacturer dimmer compatibility list.			
VOLTAGE	IT2000CE: 120 Volts (CAN & USA) IT2000CE2: 277 Volts (USA)			
TRANSFORMER	Lightech Electronic Transformer, # Let75 model 75 VA 120V/12V — 75 VA 277V/12V			
COMPATIBLE TRIMS	R2000 R2051 R2100	R2100VT R2450VT S2000	S2100 T2000	
THERMAL PROTECTION	TC 248°F (120°C)			
CERTIFICATION	cULus E174023 for damp locations.			
WARRANTY	5 years on socket and 3 years on electronic transformer.			

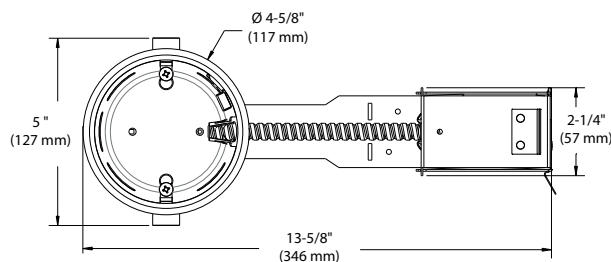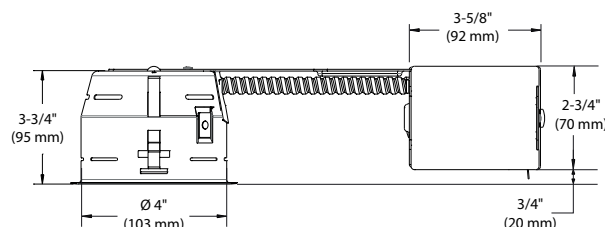

CODIFICATION EXAMPLE



ORDERING CODE

MODEL	SERIES	HEIGHT	TRANSFORMER	TENSION
IT	2000	C	E	
IT Remodel	2000 4" Series	C Short	E Electronic	120 Volts
				2 277 Volts

