

NWLD300




3-1/2" Series - Concerto LED

New Construction Non-IC Housing

Project	
Notes	
Fixture Type	
Date	

SPECIFICATIONS


HOUSING DETAILS	Galvanized steel housing with a thickness up to 18 gauge (0,051" / 1,3 mm). Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires). Below-ceiling accessible.																															
MOUNTING	Cutout diameter: Ø 3-5/8" (92 mm) Insulated material must be kept at least 3" (76 mm) away from the fixture. Can fit in ceilings up to 1-1/2" (38 mm) thick. Contrast hooks for ease of installation and a perfect fit to ceiling. No light leakage. Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.																															
PERFORMANCE	Performance 1: 1,500 lumens (16W) Performance 2: 2,000 lumens (23W) Performance 3: 2,500 lumens (30W)																															
POWER	ELV: 120V only 0-10V: Dual Voltage - 120V / 277V																															
DIMMING	2 types of dimming offered: <ul style="list-style-type: none"> • Electronic Low Voltage (ELV) • 0-10V <p>Due to constant evolution of dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com</p>																															
COMPATIBLE TRIMS	NWLD300 V/D 1/2	NWLD300 D3																														
	<table border="1"> <thead> <tr> <th>Performance 1 16W</th> <th>Performance 2 23W</th> <th>Performance 3 30W</th> </tr> </thead> <tbody> <tr><td>LD3A</td><td>LD3A</td><td>LD3D</td></tr> <tr><td>LD3B</td><td>LD3B</td><td>LD3E</td></tr> <tr><td>LD3C</td><td>LD3C</td><td>LD3F</td></tr> <tr><td>LD3D</td><td>LD3D</td><td></td></tr> <tr><td>LD3E</td><td>LD3E</td><td></td></tr> <tr><td>LD3F</td><td>LD3F</td><td></td></tr> <tr><td>LD3G</td><td>LD3G</td><td></td></tr> <tr><td>LD3H</td><td>LD3H</td><td></td></tr> <tr><td>LD3I</td><td>LD3I</td><td></td></tr> </tbody> </table>	Performance 1 16W	Performance 2 23W	Performance 3 30W	LD3A	LD3A	LD3D	LD3B	LD3B	LD3E	LD3C	LD3C	LD3F	LD3D	LD3D		LD3E	LD3E		LD3F	LD3F		LD3G	LD3G		LD3H	LD3H		LD3I	LD3I		
Performance 1 16W	Performance 2 23W	Performance 3 30W																														
LD3A	LD3A	LD3D																														
LD3B	LD3B	LD3E																														
LD3C	LD3C	LD3F																														
LD3D	LD3D																															
LD3E	LD3E																															
LD3F	LD3F																															
LD3G	LD3G																															
LD3H	LD3H																															
LD3I	LD3I																															
THERMAL PROTECTION	Performance 1: TC 149°F (65°C) Performance 2: TC 176°F (80°C) Performance 3: TC 176°F (80°C)																															
CERTIFICATION	cULus E343977 for damp and wet locations																															
WARRANTY	5 years on LED driver.																															

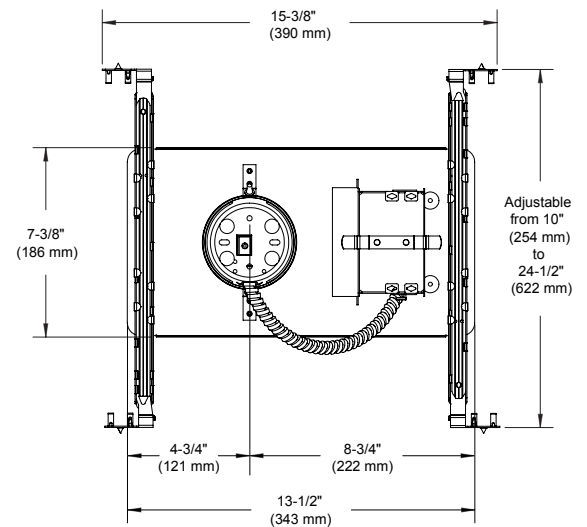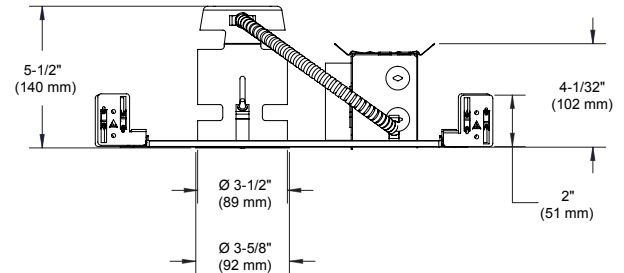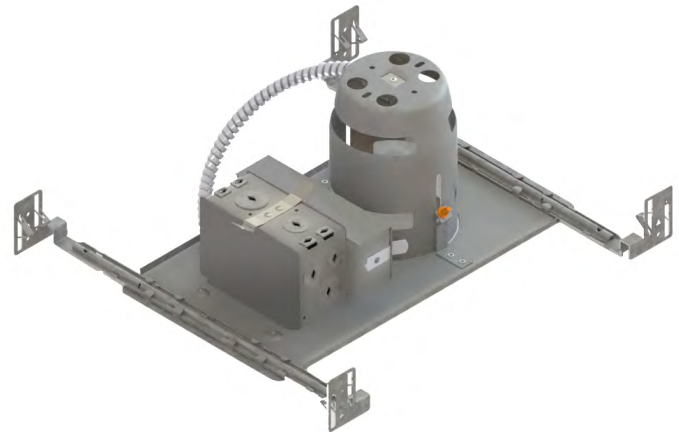

NWLD300

3-1/2" Series - Concerto LED

CODIFICATION EXAMPLE

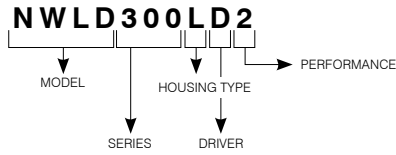

ORDERING CODES

MODEL	SERIES	HOUSING TYPE	DRIVER	PERFORMANCE
NWLD	300	L		
NWLD New Construction Non-IC Housing	300 300 Series	L Long	*V ELV - 120V Only D 0-10V - Dual Voltage (120V / 277V)	1 16W 2 23W 3 30W

***(V available only in Performance 1 and 2)**

**Performance 1 and 2 housings are compatible with performance 2 trims.
Performance 3 housings are only compatible with performance 3 trims.**

