T3100


3-1/2" Series - Classic/Evolution

Project

Notes

Fixture Type

Date

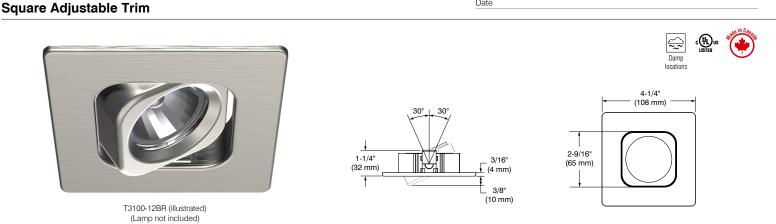

SPECIFICATIONS

SFECIFICATION	5			
TRIM	Die-formed steel.			
Options in red may generate a longer production lead time	Different finishes available:			
	Powder coat painted (Standard) White (-01), Black (-02), Architectural Bronze (-05), Antique Cooper (-06), Matte White (-11), Matte Black (-22) and Polar Grey (-25) Plated (Premium) 24K Gold Plated (-03), Chrome (-04), Brushed Chrome (-04BR), Brushed Nickel (-12BR) and Satin Nickel (-13)			
LAMPS (not included)	GU10 LED 10W MAX MR16 GU5.3 37W MAX (Remodel and Insulated housing) (protected lamps only) MR16 LED GU5.3 10W MAX 50W MAX (New Construction housing) (protected lamps only)			
	If you want to use the dimming option and you use a LED lamp, please refer regularly to the lamp manufacturer compatibility list.			
	For MR16 LED lamp usage, please refer to the selected housing specification sheet for details on transformer models (see compatible housing list below).			
CEILING CUTOUT	ø 3-5/8" (92 mm)			
ACCESSORIES	Goof Rings (see ordering code)			
	Choice of optional lenses to customize your lighting: (see ordering codes)			
	Clear (C): Frosted (F) Honeycomb (H): the honeycomb louver reduces glare Linear (L): the linear lens directs the lamps beam to create a strip of light Prismatic (P): the prismatic lens diffuses and spreads the light in an even overall pattern Solite (S): the solite lens softens the light in an even overall pattern			
	Although not dangerous, the use of a 49 mm lens in conjunction with an LED lamp can result in overheating of the latter, reducing its lifespan.			
	Contrast cannot be held responsible for the overheating of LED lamps used with accessory lenses.			
CERTIFICATION	cULus for damp locations (for LED and halogens lamps)			

CONTRASTE

PRINTED IN CANADA

1009, rue du Parc Industriel Lévis (Québec) G6Z 1C5 Canada Tel.: 1-888-839-4624 Fax.: 1-877-839-7057 contrastlighting.com info@contrastlighting.com

© 2021 Contrast Lighting M.L. Inc. All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


T3100 3-1/2" Series – Classic/Evolution

Square Adjustable Trim

SPECIFICATIONS (CONT'D)

COMPATIBLE HOUSI	NGS		
	Remodel Housing	New Construction Housing	Insulated Housing
	IC / Air Tight	IC / Air Tight	IC / Air Tight
LED 10W	RE35GU10-10W RE35MR16-120-10W RE35MR16-277-10W	NW35GU10-10W NW35MR16-120-10W NW35MR16-277-10W	IC35GU10-10W IC35MR16-120-10W IC35MR16-277-10W
HALOGENS 37W/50W	Non-IC / Non Air Tight RE35MR16-120-37W RE35MR16-277-37W	Non-IC / Non Air Tight NW35MR16-120-50W NW35MR16-277-50W NW35MR16-120D-50W NW35MR16-277D-50W	IC / Non Air Tight IC35MR16-120-37W IC35MR16-277-37W IC35MR16-12DD-37W IC35MR16-277D-37W

CODIFICATION EXAMPLE



ORDERING	CODES	Options in red may generate a longer production lead time.	
MODEL	TRIM FINISHES		
T3100			
T3100	-01 -02 -11 -22 -25 -05 -06	POWDER COAT PAINTED (Standard) White Black Matte White Matte Black Polar Grey Architectural Bronze Antique Copper	
	-04BR -12BR -03 -04 -13		

PRINTED IN CANADA

CONTRASTE

1009, rue du Parc Industriel Lévis (Québec) G6Z 1C5 Canada Tel.: 1-888-839-4624 Fax.: 1-877-839-7057 contrastlighting.com info@contrastlighting.com © 2021 Contrast Lighting M.L. Inc. All rights reserved PAGE 2/3

Damp locations

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

T3100 3-1/2" Series - Classic/Evolution

Square Adjustable Trim

GOOF RINGS

Goof rings correct the openings too large or damaged ceiling cutout.

All goof rings are available in all Contraste finishes. Add finish color code at the end of the goof rings code. Ex.: RON3100-06

Code: RON3100

Outside dimensions: 5" (127 mm) x 5" (127 mm) Inside diameter: ø 3-5/8" (92 mm)

LENSES (49 MM)

For a modification of the light distribution.

Clear (C): 103104 Frosted (F): 304826 Honeycomb (H): 103089 Linear (L): 103092 Prismatic (P): 103095 Solite (S): 103098

CONTRASTE 1009, rue du Parc Industriel Lévis (Québec) G6Z 1C5 Canada Tel.: 1-888-839-4624 Fax.: 1-877-839-7057 contrastlighting.com PRINTED IN CANADA info@contrastlighting.com

© 2021 Contrast Lighting M.L. Inc. All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.



PAGE 3/3

